

# SC-106AT

## Salah Time Panel for Home



SC-106AT

## User Manual



# Index

- SET TIME _____	1
- SET HIJRI _____	2
- SET VAR _____	3
- SET CITY _____	5
- SET Adv. (Advance) _____	7
- VEIW Salah _____	10
- Remaining Time Indications _____	10

## Remote Setting:

- Press **5** for minimum 3 Seconds to un-lock the Panel.  
Press **Time** then "TIME SET" starts blinking. (page # 1)
- Press **5** for minimum 3 Seconds to un-lock the Panel.  
Press **Hijri** then "HIJRI SET" starts blinking. (page # 2)
- Press **5** for minimum 3 Seconds to un-lock the Panel.  
Press **City** then "CITY SET" starts blinking. (page # 5)
- Press **5** for minimum 3 Seconds to un-lock the Panel.  
Press **Iqamah** then "Qari Name" starts blinking. (page # 7)



## To Play Tilawa'at at any Time:

Now you can listen Tilawa't at any time.

- Press **Iqamah** button for minimum 2 Seconds then Surah name starts blinking.
- Use **+** / **-** to select desired Sura and then press **SET** to play.
- Use **+** to set volume Increment / Decrement.

## New Feature

**Sunset + 9**

Counter of 9 Minutes from to Maghrib Timing during Ramadan.

# User Manual

Panel have 6 Menu selections to set different parameters:

- |             |              |               |
|-------------|--------------|---------------|
| 1. SET TIME | 2. SET HIJRI | 3. SET VAR    |
| 4. SET CITY | 5. SET Adv   | 4. VEIW Salah |

Note: First Unlock the Panel to go into any Menu option.

- For this press and hold Unlock button for minimum 3 seconds,
- when mark  appears, press **MENU** and **SET** to enter a desired option.

1.



- Press **SET** to enter Menu.
- Seconds start blinking.
- Press **+** to set the Seconds in 00.
- Press **SET** and **+/-** to set Time and Date parameters.

2.



### To set Date, Month and Year into Hijri Set:

- Press **SET** to enter Menu.
- Hijri Date starts blinking.
- Use **+**/**-** to adjust current Date.
- Press **SET** , Hijri Month starts blinking.
- Use **+**/**-** to adjust current Month.
- Press **SET** , Hijri Year starts blinking.
- Use **+**/**-** to adjust current Year.
- Press **SET** , English Date starts blinking.
- If need to changes, then change it or exit.

---

### SET Variables

1. Set Language
2. Set Fiqah (Juristical Method)
3. Set Ishraq Time
4. Set Zawal Time
5. Set Delay for Screen
6. Set Screen Move Or Still Option
7. Set Nafil
8. Set Chasht
9. Set Speaker ON/OFF
10. Set Messages ON/OFF
11. Set 12Hr/24Hr
12. Set Changing of Hijri date at Maghrib OR at 12:00AM
13. Night Mode
14. Factory Reset

3.




**Select Display Language:**  
Urdu & English,



**Select Fiqah:**



HF = Hanffii, SH = Shaffii & H1 = Zoha Kobra (Hanaffi).



**Sunrise to Ishtraq Duration:**

Set on 0 to 25 minutes.



**Zawal Duration:**

Set at 0 to 20 minutes.



To get suitable Zawal duration set few minutes before and after Zawal.

**Before Zawal:** Set (-ZL) 0 to 10 minutes.

**After Zawal:** Set (+ZL) 0 to 10 minutes.



**Slide Delay:**

Set at 5 to 15 seconds between each slide.



**Slide Mode:**

**ON MOVE** : Moving Messages.



**OFF MOVE** : Still (Flip on change).



**Nafl Namaz Timings:**

Set ON to display all Nafl Namaz like Ishraq and Chasht in the slide.



Set OFF to not display in the slide.



### To Set Chasht:

Chasht starts after a quarter of the day passes.  
Day start time assumed from the Fajr.



Here day start time is taken from Sunrise



The Chasht starts at the same time as Ishraq.



To Set ON speaker volume.  
To Set OFF speaker volume.



### Special Messages:

Will appear on the slide like "EID MUBARAK".  
Block special messages in display.



### Day Light Saving:

ON: 1 hr added to current time and all slah times.  
OFF: To disable DST



### To Select 12 Hours or 24 Hours Format



✓ : Hijri Date will be changed after Maghrib.

✗ : Hijri Date will be changed at 12 AM.










### To Set ON Night Mode:

Auto Brightness adjustment on 11 PM to Fajr time.



### Factory Setting:



If you need to reset all settings, then select  and press  then  starts Blinking. if you do not want to reset the Panel then press  to exit. Or use  to select  and then press  then Panel will revert to its previous setting.

4.



- First, find the required City code from the given City code list.
- Press **SET** to enter Menu.
- Select Code via **+**/**-**. Press **SET** to save.

## New City Addition

- If your desired City is not available in the given City List, you may add it by setting City Latitude, Longitude and Time Zone. For this you have to set City Code 0000 in [City SET] menu option.



- Press **SET** to enter set mode. Select Code 0000.



- Press **SET** to enter Latitude, use **+**/**-** to set Latitude.



- Press **SET** to enter Longitude, use **+**/**-** to set Long.




- Press **SET** to enter Time Zone (GMT), use **+**/**-** to set Time Zone.



- Press **SET** to enter Calculation Method, use **+**/**-** to set Method.

## Calculation Method

- 00 Method : University of Islamic Science Karachi.  
(Fajr Twilight =  $18^{\circ}$ , Isha Twilight =  $18^{\circ}$ )
- 01 Method : Islamic Society of North America.  
(Fajr Twilight =  $15^{\circ}$ , Isha Twilight =  $15^{\circ}$ )
- 02 Method : Muslim World League.  
(Fajr Twilight =  $18^{\circ}$ , Isha Twilight =  $17^{\circ}$ )
- 03 Method : Ummal Qura Comittee.  
(Fajr Twilight =  $18.5^{\circ}$ , Isha Twilight = 90 min after sunset)
- 04 Method : Egyption General Authority.  
(Fajr Twilight =  $19.5^{\circ}$ , Isha Twilight =  $17.5^{\circ}$ )
- 05 Method : It is used to set Fajr Twilight Angle and Isha Twilight by users choice.  
First set Fajr Angle (F A)  $10.0^{\circ}$  to  $24.0^{\circ}$  and then Isha Angle (I A)  $10.0^{\circ}$  to  $24.0^{\circ}$ .

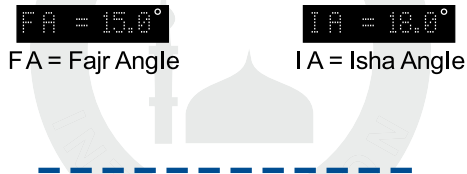

## SET ADV. (Advance Setting)

1. Set Azan
2. Set Tilawat
3. Set Dua
4. SET Alarm



5.



## Azan Setting:

Nine Azan are stored. Select to play different Azan for each Salah or Fix one Azan for All Salah.

Select **SET AZAN** , Use **+** / **-** , and set **PAIR** or **PAIR** or **OFF PAIR**

Set likewise Azan or Takbeer for all remaining Prayers.

## To Set Volume:



Use **+** / **-** set volume 1 - 10. This volume will be used for all voices.

### Note

Press CITY button during Tilawat to PAUSE/PLAY.

## Set Daily Tilawat:

There are 7 Surah saved in clock. One can select to play each Surah daily at any preset time or to play one Fix Surah daily to play.



Select **SET Tilawat** , **ON RECITE** starts blinking.



Press **SET** to enter set mode, Qari names starts blinking.



Use **+** / **-** and **SET** to set Qari name, so that you can listen tilawat on your selected Qari voice.



To play all 7 surah one by one daily.



To play only selected surah daily by using **+** / **-** , Surah Name will appear one by one for selection. Next, set time to play Surah

Surah	Days	Voice		Duration Min
سورة الكهف	Friday	رعد محمد الكردى	Complete	23:49
سورة البقره	Saturday	مشارع راشد العفاسى	Ayat: 1 to 73	25:14
سورة سجده	Sunday	سعد الغامدى	Complete	07:20
سورة يسين	Monday	مشارع راشد العفاسى	Complete	17:48
سورة الرحمن	Tuesday	رعد محمد الكردى	Complete	12:02
سورة الواقعه	Wednesday	سعد الغامدى	Complete	08:37
سورة الملك	Thursday	عبد الباسط عبد الصمد	Complete	14:05

### To Set Dua of After Azan:

Select **SET DUA** , **ON AZAN** start blinking.

**ON AZAN**

Set it ON mode, then Dua will be played after all Azan.

**OFF AZAN**

### Set Manzil:

Manzil Dua is a collection of Ayaat and short Surah taken from Quran.

Option is available to play daily on a preset time.

**ON Manzil**

ON: Set it ON mode and play at selectable time

**OFF Manzil**

### Al Ruqyah Al Shariah:

Al Ruqyah Al Shariah is a collection of Ayaat and short Surah taken from Quran. Option is available to play daily on a preset time.

**ON الرقية الشرعية**

ON: Set it ON mode and play at selectable time

**OFF الرقية الشرعية**

## Tahajjud Alarm:

Select **SET ALARM**, **ON T.ALM** start blinking.

For Tahajjud Alarm, you need to set Offset time (10 – 90 Minutes) according to Fajr.

For example, If you set 30 Minutes Alarm then Alarm starts to play before 30 minutes of Sunrise.

## To Set Fajr Alarm:

**ON T.ALM**

Set ON mode, then **10 T.ALM** starts blinking.

Use **+** / **-** to set Minutes, and press **SET** then alarm **10 =VOL** starts blinking.

Use **+** to set the volume and press **SET** then press **EXIT**

## Fajr Alarm:

For Fajr Alarm, you need to set Offset time (10 – 90 Minutes) according to Sunrise.

For example, If you set 30 Minutes Alarm then Alarm starts to play before 30 minutes of Sunrise.

## To Set Fajr Alarm:

**ON F.ALM**


Set ON mode, then **10 F.ALM** starts blinking.

Use **+** / **-** to set Minutes, and press **SET** then alarm **10 =VOL** starts blinking.

Use **+** to set the volume and press **SET** then press **EXIT**

6.



- Press  to enter in the Menu.
- Now you can see all the start timings of Salah at a time.




## Remaining Time Indications

There are 6 different countdown timers available.



**Tahajjud:** Last 30 minutes will be displayed.



**Sunrise:** Last 10 minutes countdown will start automatically.



**Zawal:** Last 10 minutes countdown will start automatically.



**Sunset:** Countdown for remaining 10 minutes.



**Sehri:** During Ramazan, Countdown starts for the last 30 minutes.




**Iftar:** During Month of Ramazan it displays remain iftar to the Last 10 minutes.



Head Office:

Office # 412, 4th Floor, Madina City Mall, Abdullah Haroon Road, Saddar,  
Karachi-74400, Pakistan.



Tel: +92(21)-35217256, 35654771-74 / Cell  :+92-3360837535

Email: [info@systemsintegration.com.pk](mailto:info@systemsintegration.com.pk)

Url: [www.systemsintegration.com.pk](http://www.systemsintegration.com.pk)

Lahore:

Shop # 345-G,  
Panorama Centre,  
The Mall Road.  
Tel: 042-36299705/06  
Cell: 0331-4282515

Multan:

Shop # 38,  
Multan Commercial Centre,  
Vehari Road.  
Tel: 061-6242323  
Cell: 0334-1757159

Hyderabad:

Shop # 4,  
Hira Chamber Tilak Chari,  
Op. Aftab Surgical.  
Tel: 022-2631434  
Cell: 0331-8368608