SPT-HOME
Salah Time Panel for Home

User Manual

Index

Remote Setting:

- Press ⑤ for minimum 3 Seconds to un-lock the Panel.
  Press (Time) then "TIME SET" starts blinking. (page # 1)

- Press ⑤ for minimum 3 Seconds to un-lock the Panel.
  Press (Hijri) then "HIJRI SET" starts blinking. (page # 1)

- Press ⑤ for minimum 3 Seconds to un-lock the Panel.
  Press (City) then "CITY SET" starts blinking. (page # 4)

User Manual

Panel have 6 Menu selections to set different parameters:

1. SET TIME   2. SET HIJRI   3. SET VAR
4. SET CITY   5. SET Adv

Note: First Unlock the Panel to go into any Menu option.

- For this press and hold Unlock button for minimum 3 seconds,

- when mark [image] appears, press (MENU) and (SET) to

  enter a desired option.

1.

- Press (SET) to enter Menu.

- Seconds start blinking.

- Press (+) to set the Seconds in 00.

- Press (SET) and (+)/(−) to set Time and Date parameters.

2.

To set Date, Month and Year into Hijri Set:

- Press (SET) to enter Menu.

- Hijri Date starts blinking.

- Use (+)/(−) to adjust current Date.

- Press (SET) , Hijri Month starts blinking.

- Use (+)/(−) to adjust current Month.

- Press (SET) , Hijri Year starts blinking.

- Use (+)/(−) to adjust current Year.

- Press (SET) , English Date starts blinking.

- If need to changes, then change it or exit.

- - - - - - - - - - -

SET Variables

1. Set Language
2. Set Fiqah (Juristical Method)
3. Set Ishraq Time
4. Set Zawal Time
5. Set Delay for Screen
6. Set Screen Move Or Still Option
7. Set Nafil
8. Set Chasht
9. Set Speaker ON/OFF
10. Set Messages ON/OFF
11. Set 12Hr/24Hr
12. Set Changing of Hijri date at Maghrib OR at 12:00AM

3. SET VAR

 ENG

Select Display Language:
Urdu, Arabic & English,

 HF
SH

Select Fiqah:
HF = Hanffi, SH = Shaffi & H1 = Zoha Kobra (Hanaffi).

 11 ISHRA

Sunrise to Ishtraq Duration:
Set on 0 to 25 minutes.

Zawal Duration:
Set at 0 to 20 minutes.
To get suitable Zawal duration set
few minutes before and after Zawal.
Before Zawal: Set (-ZL) 0 to 10 minutes.
After Zawal: Set (+ZL) 0 to 10 minutes.

Slide Delay:
Set at 5 to 15 seconds between each slide.

Slide Mode:
ON MOVE   : Moving Messages.
OFF MOVE : Still (Flip on change).

Nafl Namaz Timings:
Set ON to display all Nafl Namaz like Ishraq
and Chasht in the slide.

Set OFF to not display in the slide.

To Set Chasht:
Chasht starts after a quarter of the day passes.
Day start time assumed from the Fajr.

Here day start time is taken from Sunrise

The Chasht starts at the same time as Ishraq.

To Set ON speaker volume.
To Set OFF speaker volume.

Special Messages:
Will appear on the slide like "EID MUBARAK".

Block special messages in display.

Day Light Saving:
ON: 1 hr added to current time and all slah times.

OFF: To disable DST

3

 ✓ : Hijri Date will be changed after Maghrib.

✗ : Hijri Date will be changed at 12 AM.

4.

- First, find the required City code from the given City code list.

- Press (SET) to enter Menu.

- Select Code via (+)/(−). Press (SET) to save.

New City Addition

- If your desired City is not available in the given City List, you may add it by setting City Latitude, Longitude and Time Zone. For this you have to set City Code 0000 in [City SET] menu option.

 - Press (SET) to enter set mode. Select Code 0000.

 - Press (SET) to enter Latitude, use (+)/(−) to set Latitude.

 - Press (SET) to enter Longitude, use (+)/(−) to set Long.

 - Press (SET) to enter Time Zone (GMT), use

  to set Time Zone.

 - Press (SET) to enter Calculation Method, use

  to set Method.

Calculation Method

- 00 Method : University of Islamic Science Karachi.
  (Fajr Twilight = 18°, Isha Twilight = 18°)

- 01 Method : Islamic Society of North America.
  (Fajr Twilight = 15°, Isha Twilight = 15°)

- 02 Method : Muslim World League.
  (Fajr Twilight = 18°, Isha Twilight = 17°)

- 03 Method : Ummal Qura Comittee.
  (Fajr Twilight = 18.5°, Isha Twilight = 90 min after sunset)

- 04 Method : Egyption General Authority.
  (Fajr Twilight = 19.5°, Isha Twilight = 17.5°)

- 05 Method : It is used to set Fajr Twilight Angle and Isha Twilight by users choice.
  First set Fajr Angle (F A) 10.0° to 24.0° and then Isha Angle (I A) 10.0° to 24.0°.

FA = 15.0°   IA = 18.0°

F A = Fajr Angle   I A = Isha Angle

– – – – – – – – – – – –

SET ADV. (Advance Setting)

1. Check Tilawat (Or Play setting)
2. Set Azan
3. Set Volume
4. Set Tilawat
5. Set Manzil
6. Load City Data
7. Set Nafil
8. Reset to Default

5. SET ADV.

To Listen Tilawat at any time time.

Skip to Listen Tilawat.

Azan Setting:

Five Azan are stored. Select to play different Azan for each Salah or Fix one Azan for All Salah.

✓AllAzan	To play different Azan for each Salah
XAllAzan	To play only selected Azan for each Salah except Fajr (Note: Fajr Azan is Fixed)

To Set Volume:

03 =vol	Use (+) / (−) set volume 1 - 10. This volume will be used for for all voices.

Set Daily Tilawat:

There are 7 Surah saved in Panel. One can select to play each Surah daily at any preset time or to play one Fix Surah daily to play.

ON Recite	Enable Surah to play daily.
Off Recite	Disable Surah to play.

✓AllSurah	To play all 7 surah one by one daily.
XAllSurah	To play only selected surah daily by using (+) / (−), Surah Name will appear one by one for selection. Next, set time to play Surah

Set Manzil:

Manzil Dua is a collection of Ayaat and short Surah taken from Quran. Option is available to play daily on a preset time.

ON منزل	ON: Set it ON mode and play at selectable time
OFF منزل	

6

Surah	Days	Voice		Duration Min
سورۃ الکھف	Friday	رعد محمد الکردی	Complete	23:49
سورۃ البقرہ	Saturday	مشاری راشد العفاسی	Ayat: 1 to 73	25:14
سورۃ سجدہ	Sunday	سعد الغامدی	Complete	07:20
سورۃ یٰسین	Monday	مشاری راشد العفاسی	Complete	17:48
سورۃ الرحمٰن	Tuesday	رعد محمد الکردی	Complete	12:02
سورۃ الواقعہ	Wednesday	سعد الغامدی	Complete	08:37
سورۃ الملک	Thursday	عبد الباسط عبد الصمد	Complete	14:05

- - - - - - - - - - - -

To Enter Namaz Chart:

If you want to remain set Panel on City Code then select `X FixCity` . Or if you need to enter your own Namaz chart into Panel, then select `✓ FixCity` via (+)/(−) and press (SET) , `X LoadData` starts blinking. Press (+)/(−) then `✓ LoadData` starts blinking. Press (SET) , `WaitCity....` starts blinking.

Its mean you may transfer the Namaz chart through Mobile Application.

Note: See page No.10 for more details.

On 24 Hr   **To Select 12 Hours or 24 Hours Format**

Factory Setting:

✓ Reset All   If you need to reset all settings, then select **✓ Reset All**

and press (**SET**) .

Remaining Time Indications

There are 6 different countdown timers available.

Tahajjud 13   **Tahajjud:** Last 30 minutes will be displayed.

Sunrise ↓ 4   **Sunrise:** Last 10 minutes countdown will starts automatically.

Zawal ↓ 3   **Zawal:** Last 10 minutes countdown will start automatically.

Sunset ↓ 6   **Sunset:** Countdown for remaining 10 minutes.

SEHRI ↓14   **Sehri:** During Ramazan, Countdown starts for the last 30 minutes.

IFTAR ↓10   **Iftar:** During Month of Ramazan it displays remain iftar to the Last 10 minutes.

Bluetooth Device

Front of the Panel

Menu / Unlock
SET
UP
Down / Exit

Button Control Setting

Hook o f Hanging

Back of the Panel
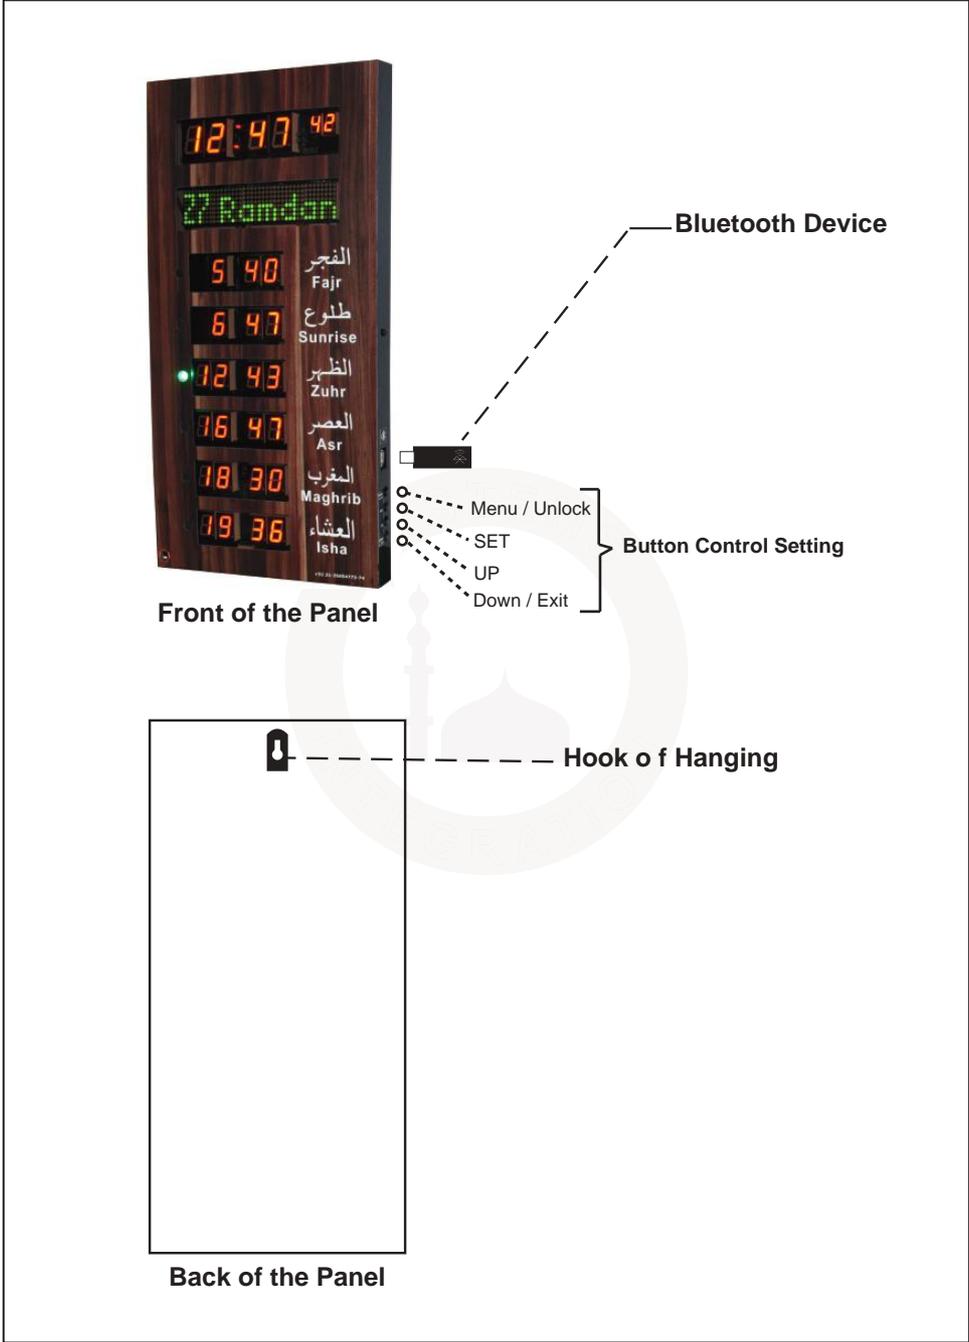
Namaz Chart Transfer
Through Mobile App

(Note: We can transfer the Yearly Start Timings of Azan through mentioned below Android Phone App).

Download the app "**Panel Salah Table**" from to Play store.

Method:

- Tap on "Add File" and select your desired Namaz Chart file.

- Go to "Menu" and tap on the "Connect" to Bloutooth pair between Mobile and Panel.

- Go to in Panel [Adv. SET] option and select ✓ FIX CITY and then select ✓ LOAD DATA and press (SET), WAIT CITY.... starts blinking.

- Tap on "SEND" then [Receiving...] starts blinking in the Panel slide.

- All data will be transferred within 2 to 3 minutes.
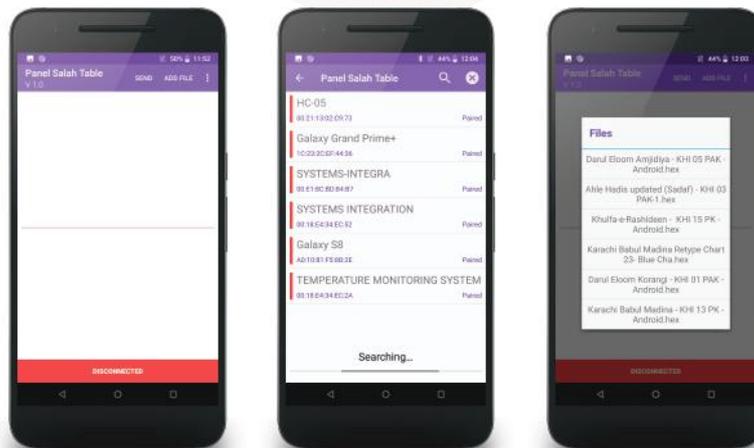
www.systemsengineering.com.pk
www.jamaattimes.com

Head Office:

Office # 412, 4th Floor, Madina City Mall, Abdullah Haroon Road, Saddar, Karachi, Pakistan.
Tel: +92(21)-35217256, 35654771-74 / Cell : +92-3360837535

Lahore:
Shop # 345-G,
Panorama Centre,
The Mall Road.
Tel: 042-36299705/06
Cell: 0331-4282515

Multan:
Shop # 38,
Multan Commercial Centre,
Vehari Road.
Tel: 061-6242323
Cell: 0334-1757159

Hyderabad:
Shop # 4,
Hira Chamber Tilak Chari,
Op. Aftab Surgical.
Tel: 022-2631434
Cell: 0331-8368608

Salaat Panel
Different Models for Masajid

SP-24

13x24 Inch

SPT-28

14x28 Inch

SPT-30

14x30 Inch

SPT-32

16x32 Inch

SPT-35

16x35 Inch

SPT-50

20x50 Inch

SPT-60F

32x60 Inch

SP-4EL

36x60 Inch